
Ⓐ 36 – 20 Tucks Road, Seven Hill NSW, 2147
Ⓟh 02 9037 8200 Ⓔ info@nswdistributors.com.au
Ⓦ www.nswdistributors.com.au

DALI DIMMABLE CONSTANT VOLTAGE
IP67

SPECIFICATIONS

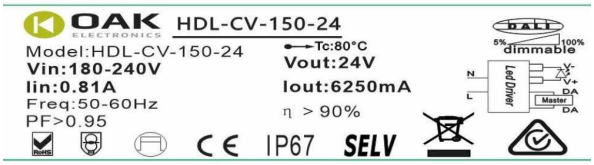

Material Specifications

Material	Extruded aluminium housing
Ingress Protection	IP67
Warranty	5 Year Replacement

Electrical Specifications

Input Type	200-240V, 50-60Hz
Connection Method	Australian F&P
Output Voltage	12V - 24V DC Constant Voltage
Dimming	DALI
Power Factor	>0.95 @ Full Load
Thermal Testing	Ta Rating -30°C to +40°C
Dimming	5% - 100% Dimming Range

VARIATIONS

HDL-CV-12-12-IP	12W, 12V - 115mm x 38mm x 22mm
HDL-CV-12-24-IP	12W, 24V - 115mm x 38mm x 22mm
HDL-CV-20-12-IP	20W, 12V -115mm x 38mm x 22mm
HDL-CV-20-24-IP	20W, 24V - 115mm x 38mm x 22mm
HDL-CV-30-12-IP	30W, 12V - 125mm x 42mm x 28mm
HDL-CV-30-24-IP	30W, 24V - 1125mm x 42mm x 28mm
HDL-CV-40-12-IP	40W, 12V - 155mm x 42mm x 28mm
HDL-CV-40-24-IP	40W, 24V - 155mm x 42mm x 28mm
HDL-CV-60-12-IP	60W, 12V - 155mm x 42mm x 28mm
HDL-CV-60-24-IP	60W, 24V - 155mm x 42mm x 28mm
HDL-CV-80-12-IP	80W, 12V - 180mm x 44mm x 32mm
HDL-CV-80-24-IP	80W, 24V - 180mm x 44mm x 32mm
HDL-CV-100-12-IP	100W, 12V - 180mm x 44mm x 32mm
HDL-CV-100-24-IP	100W, 24V - 180mm x 44mm x 32mm
HDL-CV-150-12-IP	150W, 12V - 185mm x 50mm x 40mm
HDL-CV-150-24-IP	150W, 24V - 185mm x 50mm x 40mm
HDL-CV-240-24-IP	240W, 24V - 207mm x 68mm x 38mm
HDL-CV-300-24-IP	300W, 24V - 207mm x 68mm x 38mm

© NSW Distributors 2026